


CMEC CONNECTOR

Board-to-wire

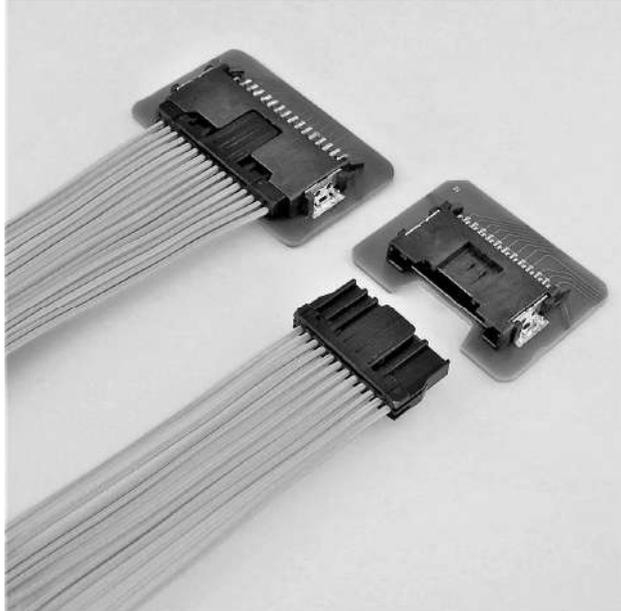

Developed in pursuit of miniaturization and low profile as surface mounting type connector for automotive.

■ Features


● Miniaturization and Low Profile

0.50 terminal with 2.0mm pitch realized miniaturization and low profile.

Max male and female connector mating and unmating operation height: 6.5mm.

Integrated housing latch design to keep good hand feeling.

High terminal reliability with TPA structure.

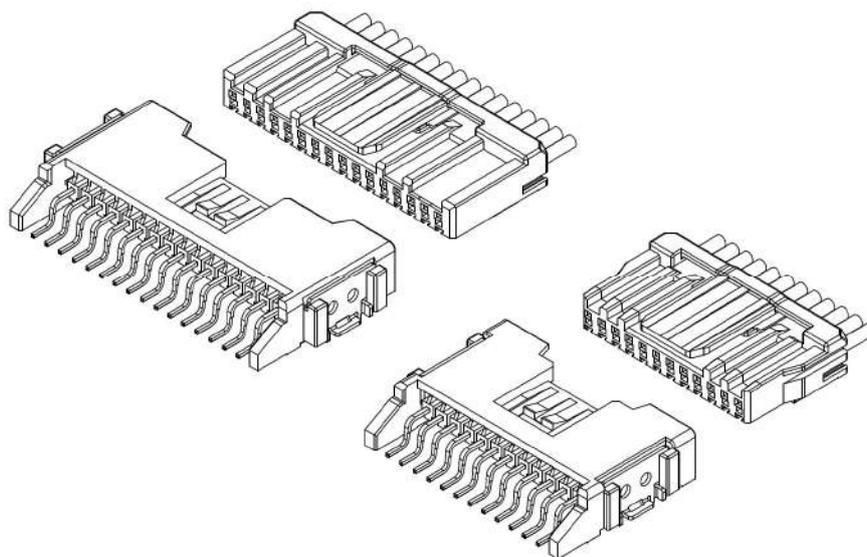


■ Specifications

- Current rating : 3A AC, DC max
- Withstanding voltage: 1,000 VAC / minute
- Temperature range : -40°C to +105°C
(including temperature rise in applying electrical current)
- Contact resistance : Initial value/ 10 mΩ max.
After environmental tests/ 20 mΩ max.
- Insulation resistance : 100 MΩ min.
- Applicable wire : AESX 0.3mm² , UL3265 0.3mm²
FLRY-A 0.35mm² , AVSS 0.3mm²
(Equivalent to AWG#22, Insulation O.D.Ø1.4mm max)

*Compliant with ELV/RoHS.

*Contact JST for details.

Female terminal

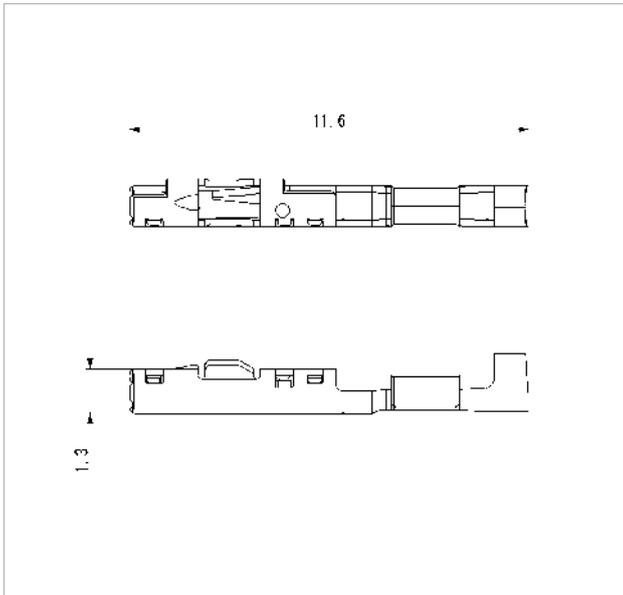




Model No.	Applicable wire range		Q'ty/reel
	Conductor (mm ²)	Insulation O.D. (mm)	
SMEC-A021T-M0.5	0.3	1.4 max.	10,000

Material and Finish




Copper alloy, nickel-undercoated, tin-plated

Female connector

● 12 circuits



● 16 circuits



Circuits	Model No.	Housing Color	Q'ty/box
12	12CMEC-B-1A-K-A	Black	2,079
	12CMEC-B-1A-K-B	Black	2,079
16	16CMEC-B-1A-K-A	Black	1,701
	16CMEC-B-1A-K-B	Black	1,701



Material and Finish

Housing: PBT, Black (UL94 V-0)
 Retainer: Glass-filled PBT, Blue (UL94 V-0)


Note: Color/Key codes other than above mentioned housing are also available.
 Contact JST for details.

Male connector



● 12 circuits




Circuit No.



● 16 circuits



Circuit No.



Circuits	Model No.	Housing Color	Q'ty/box
12	SM12B-CMECK-1A-A	Black	1,200
	SM12B-CMECK-1A-B	Black	1,200
16	SM16B-CMECK-1A-A	Black	1,200
	SM16B-CMECK-1A-B	Black	1,200



Material and Finish

Housing: Glass-filled LCP, Black (UL94 V-0)
Pin: Copper alloy, nickel-undercoated, tin-plated


Note: Key codes other than abovementioned housing are also available.
Contact JST for details.

Taping specifications


● 12,16 circuits

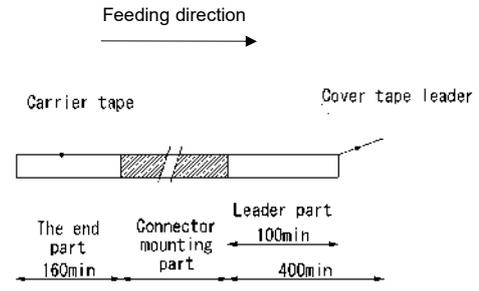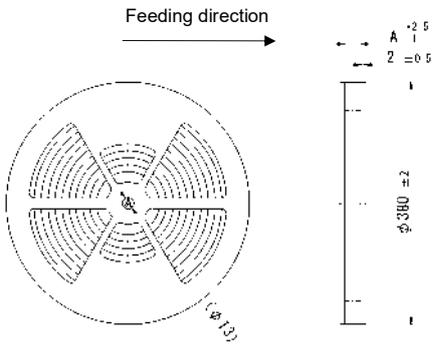

● 12 circuits

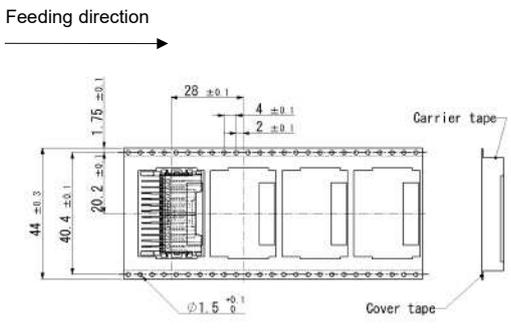


● 16 circuits

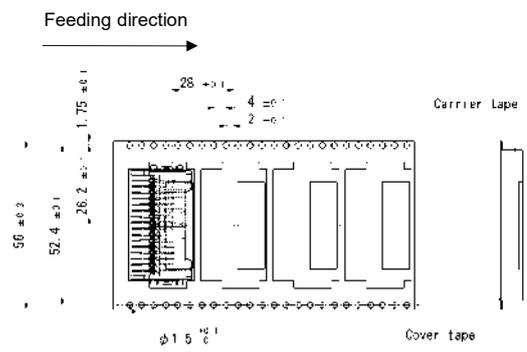


PC board layout, Assembly layout

SMT type Single row

● 12 circuits

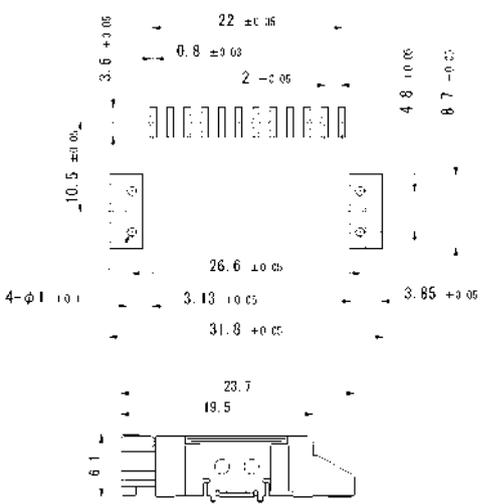

● 16circuits

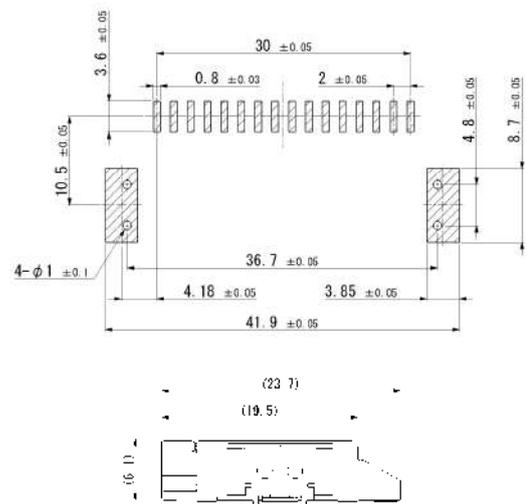

Note: 1. Tolerances are non-cumulative: $\pm 0.05\text{mm}$ for all centers.
 2. Hole dimensions differ according to the type of PC board and piercing method.
 The dimensions above should serve as guideline. Contact JST for details.

Crimping machine, Applicator

Strip terminal	Crimping machine	Crimp applicator MKS-L	
		Dies	Crimp applicator with dies
SMEC-A021T-M0.5	AP-K2N	MK/SMEC-A021-05	APLMK SMEC-A021-05

Note: 1. Contact JST for details.
 2. When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.